


DC2 DC-DC Converters

DC2 line of converters was originally introduced in 2001. Specifically designed for communication systems, DC2 provides multiple output points for ease of wiring and installation.

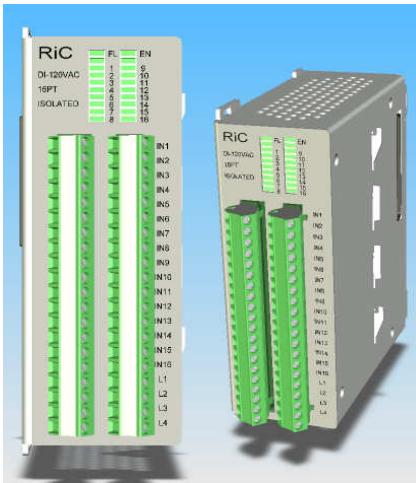

DC2 100 W

SIZE:	2¼" x 4¾" x 5¾" (5.7mm x 12mm x 14.6mm)
WEIGHT:	2.2 lbs (1Kg)
CONNECTION:	2 x 20 pluggable screw terminal (inputs)
TEMP:	-20C to +65C (storage) -10C to +50C (operating)



DC2 300 W

SIZE:	2¼" x 4¾" x 5¾" (5.7mm x 12mm x 14.6mm)
WEIGHT:	2.2 lbs (1Kg)
CONNECTION:	2 x 20 pluggable screw terminal (inputs)
TEMP:	-20C to +65C (storage) -10C to +50C (operating)

Specification

Regulation:	< 0.5% for input variation of 10%
Short Circuit Protection:	Fuse
Indication:	Fault LED

Input / Output / Approval

Input Voltage:	48
Output Voltage:	12, 24 VDC
Approvals:	CSA